INSTRUCTION SHEET #A230606

## **EL Series Solid Gowning Benches**with Welded H-Frame

## **ASSEMBLY INSTRUCTIONS**


## **CAUTION**

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING
CARRIER FOR ANY DAMAGE. **SAVE YOUR BOX AND ALL PACKING MATERIALS.**YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

See reverse side for Units with Adjustable H-Frame.


## Step 1 - Attach frame to seat.


- Lay seat upside down so that the gussets face upward.
   Note: Take care not to scratch the finish.
- Insert legs into gussets.
- Tighten all screws.



#### Step 2 - Assemble feet to bottom of legs.

• Use a rubber mallet to insert feet into legs.



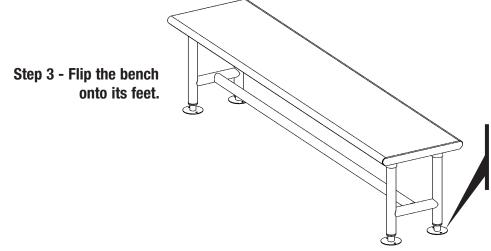

#### Step 4 - Secure feet to the floor.

Hardware not included.

Note:  $96^{\circ}$ -long units feature six (6) legs/feet. All other lengths have four (4) legs).

Assembly is complete.



EG9928 Revised 12/24



- 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.
- Phone: 302/653-3000 800/441-8440 Fax: 302/653-2065
- www.eaglegrp.com www.eaglemhc.com

# **EL Series Solid Gowning Benches** with Adjustable H-Frame

## **ASSEMBLY INSTRUCTIONS**


### **CAUTION**

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING
CARRIER FOR ANY DAMAGE. **SAVE YOUR BOX AND ALL PACKING MATERIALS.**YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

See reverse side for Units with Welded H-Frame.


## **Step 1 - Assemble crossbrace subassembly.**

- Assemble castings to end-to-end and front-to-back crossbracing, as shown.
- Tighten set screws in the appropriate threaded holes in castings (see below).

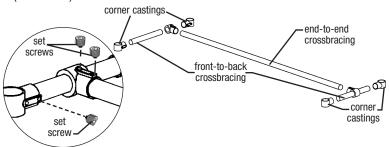


## Step 2 - Attach crossbrace subassembly to legs.

- On legs, measure and mark desired height of crossbrace subassembly.
- Insert legs.
- Snug the set screws in the appropriate threaded hole in each casting (see below).




## Step 3 - Assemble feet, legs, and seat.

- Lay seat upside down so that the gussets face upward. Note: Take care not to scratch the finish.
- · Insert legs into gussets.
- Use a rubber mallet to insert feet into legs.
- · Tighten all screws.



## Step 4 - Flip the bench onto its feet.









- 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.
- Phone: 302/653-3000 800/441-8440 Fax: 302/653-2065
- www.eaglegrp.com
   www.eaglemhc.com